



Rec'd PCT/PTO 14 OCT 2005

10/553297

THE PATENT OFFICE
CONCEPT HOUSE
CARDIFF ROAD
NEWPORT
SOUTH WALES
NP10 8QQ

RECD 22 JUN 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 14 June 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

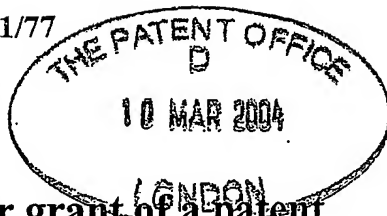

11HAR04 E879935-6 002847
P01/7700 0.00-0405412.8 ACCOUNT CHA

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	P85122GB01/MR		
2.	Patent application number (The Patent Office will fill in this part)	0405412.8		
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	Multiclip Company Limited Osprey House 63 Station Road Addlestone Surrey KT15 2AR 061855 16001 Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its incorporation United Kingdom		
4.	Title of the invention	Neutral Section		
5.	Full name of your agent (if you have one)	Haseltine Lake		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Imperial House 15-19 Kingsway London WC2B 6UD Patents ADP number (if you know it) 34001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
		United Kingdom	0312831.1	4 June 2003
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and of right to a grant of patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

Patent Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	6
Claims(s)	2
Abstract	1
Drawing(s)	8 a 8

g

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to a grant of patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Haseltine Lake, Agents for the Applicants

Signature

Date

Haseltine Lake,

10 March 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Meera Raval

[020] 7420 0500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

NEUTRAL SECTION

The present invention relates to a neutral section for use in conjunction with railway overhead conductor lines.

5

Electric trains are powered through overhead copper conductor lines, the power being conveyed via a pantograph attached to the roof of the train. The conductor lines are usually powered by 25kV AC supplied from power stations along the route of the lines. As the power stations are not synchronised, a peak-to-peak difference of up to 50kV AC can occur where two power supplies meet along the length of a conductor line. It is important to ensure that the pantograph does not register the difference in power supplies as otherwise a large electrical load would be placed on it, which could damage it and other electrical equipment in the train. As it is impractical to synchronise the power stations, they are normally isolated from each other by the provision of an assembly known as a neutral section on each conductor line.

15

It is desirable that the pantograph does not detect the presence of the neutral section on the conductor lines as, apart from electrical loading, it would then also be subject to variable reaction forces, which would be conveyed to the train to cause "bumping".

20

The neutral sections that are currently on the market include those provided by Siemens GmbH, Arthur Flury AG and Furrer & Frey AG. The neutral section of Siemens GmbH, consisting of two insulator rods mounted on plates with copper conductors being clamped thereto, is mechanically quite different from the conductors and increases the scope of shock loading on the pantograph. Although the height of the neutral section can be adjusted relative to the copper conductors in order to align them as closely as possible in the vertical plane, the catenary member that is used for such adjustment makes the neutral section assembly more bulky, increases its structural and mechanical difference from the conductor lines, and complicates its installation. An arcing horn is provided in this neutral section to channel the power dissipation that occurs if the pantograph registers the difference in power supplies. However, it is not particularly effective in this role, as often sparks are seen to form where the pantograph attaches to the neutral section. Furthermore, this neutral section is expensive, wears quickly (it needs to be replaced roughly every eight months), and requires monthly maintenance to turn the insulator sections (which wear out by virtue of point contact with the pantograph).

35

Accordingly, it is desirable to provide a neutral section that effectively isolates the conductor lines without posing a "gap" to a pantograph traversing the length of the lines, is maintenance-free during the lifetime of the product, cheap to produce and
5 simple to install.

According to an embodiment of the present invention, there is provided a neutral section for use with an overhead railway conductor line, which neutral section is disposed between the ends of the conductor line when in use and comprises an
10 insulator to isolate the ends of the conductor line from each other; wherein the neutral axis of the neutral section is such that when the neutral section is in use the neutral axis is aligned closely with the neutral axis of the conductors on its either side and the height of the insulator is chosen so that the stiffness and the dynamic mass of the neutral section closely match those of the conductors on its either side in both the
15 vertical and horizontal planes.

The structural and mechanical profile of a neutral section embodying the present invention is constructed to closely correspond with that of railway overhead copper conductor lines in order to minimise the scope of being registered by a pantograph, this
20 being achieved by closely aligning the neutral axes (median bending line) of the neutral section and the conductors on its either side, and by closely matching the stiffness and the dynamic mass of the neutral section and the conductors in both the vertical and horizontal planes.

25 An embodiment of the present invention provides a continuous running surface to the pantograph that is both coplanar with the conductors on its either side (so that the pantograph is not subject to shock loading) and narrow (since misalignment with the pantograph would cause a severe twisting action in the neutral section), and also provides the advantage that the drag imposed by the neutral section on the pantograph
30 is equal to, or less than, that exerted on it by the conductors.

Furthermore, an embodiment of the present invention provides isolation over a distance in excess of 1.5m, even when the pantograph (which is 0.2m in width) attaches to the neutral section and effectively increases its length to about 1.7m.

An embodiment of the present invention is capable of withstanding the 15kN loads, which are hung every few hundred metres along the length of the conductor lines in order to provide tension, without degrading.

- 5 An embodiment of the present invention provides all the above-discussed advantages in adverse environmental conditions such as rain, snow, contamination, etc.

Reference will now be made, by way of example, to the accompanying drawings, in which:

- 10 Figure 1 shows a neutral section embodying the present invention;
 Figure 2 shows a part of a neutral section embodying the present invention;
 Figure 3 is a more detailed drawing of Figure 2;
 Figure 4 shows a connection member used in an embodiment of the present invention;
 Figure 5 shows a neutral section embodying the present invention;
 15 Figure 6 shows front and side views of the neutral section shown in Figure 5;
 Figure 7 shows how the PTFE rails are arranged in an embodiment of the present invention; and
 Figure 8 shows an embodiment of the present invention with a modified surface.

- 20 Figure 1 shows a neutral section 1 embodying the present invention. The neutral section 1 includes an elongate insulator 10 moulded from an insulating material such as a glass-fibre reinforced epoxy composite with a 45% glass fraction. The outer surface of the insulator 10 can be chemically treated or coated with a paint to improve its shedding ability and be generally resilient in adverse environmental conditions.

25

- The neutral section 1 also contains a connection member 2 by way of which it connects to adjacent conductor ends. As shown in Figures 2 and 3, in one embodiment of the present invention, the connection member 2 is a U-shaped copper member embedded within the insulator 10 with its legs 3, 4 (hereinafter referred to as conductor tails) protruding therefrom and lying adjacent to the conductors on either side of the insulator 10. One of the conductor tails 4 is connected to an end of the conductor line using conventional splices, for example, whilst the other conductor tail 3, although usually redundant, can be used as an arcing horn if required. If there is any wear on the conductor section into which the neutral section is being fitted, the end face of the connecting conductor tail 4 can be filed accordingly so that a step height change between the neutral section and the conductor section can be avoided.
- 30
- 35

A connection member 2 used in an embodiment of the present invention is shown in more detail in Figure 4 in which Figure 4a is a perspective view, Figure 4b is a front view and Figure 4c is a side view. As can be seen most clearly from Figure 4a, pegs 5 are provided on the surface of the connection member 2, equally spaced apart and so as to protrude from the outer surfaces of the conductor tails 3, 4 at corresponding positions. The pegs 5 are driven through the surfaces of the conductor tails 3, 4, before the connection member 2 is placed in the insulator mould. When the mould sets, the pegs 5 remain firmly lodged in the insulator walls, thus ensuring that the connection member 2 is held strongly within.

10

In one embodiment of the present invention, the dimensions indicated in Figure 4 may be as follows: $a_1=30\text{mm}$, $a_2=100\text{mm}$, $a_3=17.09\text{mm}$, $a_4=200\text{mm}$, $b_1=46\text{mm}$, $b_2=34.19\text{mm}$, $b_3=22.37\text{mm}$, $c_1=20\text{mm}$, $c_2=10\text{mm}$, and $d=2.5\text{mm}$. In addition, in such an embodiment, the radii of curvature e and f are 23mm and 11.19mm , respectively.

15

In an embodiment of the present invention, the profile of the neutral section 1 is matched with those of the copper conductors with which it is to be used on its either side by aligning the neutral axes of the neutral section 1 and the copper conductors. This is achieved by designing the profile of the neutral section 1 such that its neutral axis is as low as reasonably practical, such as, for example, to lie only 12mm above the neutral axis of adjacent conductors. Furthermore, the height of the insulator is increased so that the stiffness of the neutral section 1 matches that of the conductors on its either side in both the vertical and horizontal planes.

20 To achieve these criteria, a neutral section 1 embodying the present invention can be designed as shown in Figure 5, in which Figure 5a is a front view of the neutral section 1, Figures 5b, 5c and 5d are cross-sections respectively taken on line A-A, line B-B, and line C-C, and Figure 5e shows an outer view of one face of the neutral section 1. As most clearly seen from Figures 5b to 5d, when in use, the profile of the neutral section 1 would be streamlined with those of the conductors lying adjacent to it.

30

In one embodiment of the present invention, the dimensions indicated in Figure 5 are as follows: $g_1=24.5\text{mm}$, $g_2=20.71\text{mm}$, $g_3=12\text{mm}$, $g_4=37.6\text{mm}$, $g_5=49\text{mm}$, $g_6=46.52\text{mm}$, $g_7=60\text{mm}$, $g_8=147.59\text{mm}$, $g_9=52.41\text{mm}$, $g_{10}=47.59\text{mm}$, $h_1=10\text{mm}$, $h_2=19.5\text{mm}$, $h_3=25.93\text{mm}$, $h_4=29\text{mm}$, $h_5=18.05\text{mm}$, $h_6=33\text{mm}$, $h_7=19.24\text{mm}$, $h_8=23\text{mm}$, and $h_9=46\text{mm}$. In addition, in such an embodiment, the angle i of the

35

sidewalls of the neutral section 1 is 12° . The radii of curvature in this embodiment are as follows: $j_1=5\text{mm}$, $j_2=5\text{mm}$, $j_3=1.5\text{mm}$, $j_4=200\text{mm}$, $j_5=24.5\text{mm}$, $j_6=8\text{mm}$, $j_7=11.19\text{mm}$, $j_8=22.06\text{mm}$, $j_9=8\text{mm}$, $j_{10}=1.5\text{mm}$, $j_{11}=1.5\text{mm}$ and $j_{12}=8\text{mm}$.

5 Figure 6a and 6b show respective front and side views of an embodiment of the present invention. As can be seen from Figure 6a, two rails 6, 7 are embedded in the running surface of the neutral section 1. As these rails 6, 7 lie parallel to the conductor at each end of the neutral section 1, they provide a continuous surface against which the pantograph can run. By virtue of being made of a low friction material, such as
 10 PTFE, the rails pose less frictional drag to the pantograph compared to when it traverses the length of the conductors, thus helping to reduce wear of the pantograph and insulator 10. The wear characteristics of the rails can be improved by incorporating glass beads in the PTFE. As the ends of the neutral section 1 are turned up in a vertical direction, so too are the leading ends of the rails 6, 7, (as can be seen most
 15 clearly in Figure 7) which ensures that the pantograph attaches to the rails 6, 7 without hitting them. Furthermore, by virtue of being guided by the conductor tails 3, 4, onto the rails 6, 7, the pantograph attaches to the neutral section 1 in a fluid and smooth manner.

20 In one embodiment of the present invention, the dimensions indicated in Figure 6 are as follows: $k_1=1706\text{mm}$, $k_2=200\text{mm}$, $k_3=100\text{mm}$, $k_4=21.6\text{mm}$, $k_5=37.6\text{mm}$, $k_6=49\text{mm}$, $l_1=57.5\text{mm}$, $l_2=18.43\text{mm}$, and $l_3=23\text{mm}$.

Figure 8 shows an embodiment of the present invention with a modified surface.
 25 Specifically, a semiconductor tape is attached to the spine of the neutral section 1, which has the effect of spreading the excess charge associated with arcing by conducting it along the length of the neutral section 1. Furthermore, electrical plates (barriers) 11 or "sheds" are attached to the spine of the neutral section 1 in order to increase the effective electrical path length of the neutral section 1. In an embodiment
 30 of the present invention, the barriers are made from epoxy resin with chopped strand glass fibre reinforcement. However, they could be made of any other appropriate material that is waterproof and non-conducting. It is desirable to make the surface of each barrier as spherical as possible since the presence of any sharp corners would lead to concentration of an electric field, and the undesirable scenario of a corona
 35 discharge. As can be seen from Figure 8, the electrical barriers in an embodiment of the present invention are semi-spherical in shape with slots where they are attached to

the spine of the neutral section 1. In an embodiment of the present invention, the barriers are spaced, and not necessarily periodically, at a distance of 100mm or greater. It has been found that, for the voltages that the neutral section 1 is subjected to when in use, a barrier spacing of less than 100mm becomes transparent to an electric field, which will "jump" this gap.

Although a preferred embodiment of the invention has been described, alternative implementations are possible. For example, the connection member 2 need not be U-shaped and can be any other appropriate shape. Also, the connection member 2 can be lodged within the insulator via alternative means to the pegs 5 described hereinabove. If support is required in the mid-section of a neutral section 1 embodying the present invention, the neutral section 1 may be connected to an overhead catenary system using insulation droppers attached to the spine of the section 1 via adhesive pads.

15

20

25

30

35

CLAIMS

1. A neutral section for use with an overhead railway conductor line, which neutral section is disposed between the ends of said conductor line when in use and comprises an insulator to isolate the ends of said conductor line from each other; wherein the neutral axis of the neutral section is such that when the neutral section is in use the neutral axis is aligned closely with the neutral axis of the conductors on its either side and the height of said insulator is chosen so that the stiffness and the dynamic mass of the neutral section closely match those of the conductors on its either side in both the vertical and horizontal planes.
2. A neutral section as claimed in claim 1, wherein the insulator is formed from a glass-fibre reinforced epoxy composite.
3. A neutral section as claimed in claim 2, wherein the glass-fibre reinforced epoxy composite contains a 45% glass fraction.
4. A neutral section as claimed in any preceding claim, further comprising connection members for connecting the neutral section to each end of said conductor line.
5. A neutral section as claimed in claim 4, wherein each connection member is a U-shaped member with two legs, said two legs protruding outwardly from the neutral section.
6. A neutral section as claimed in claim 5, wherein one of said two legs is used for connecting the neutral section to one end of said conductor line.
7. A neutral section as claimed in claim 5 or 6, wherein the other of said two legs can serve as an arcing horn.
8. A neutral section as claimed in any one of claims 4 to 7, wherein pegs are provided on the outer surface of each connection member.
9. A neutral section as claimed in any preceding claim, further comprising a low-friction member for providing a continuous running surface between the neutral section and each end of said conductor line, said low-friction member being disposed on the underside of the neutral section and lying parallel to the ends of the conductor line when the neutral section is in use.
10. A neutral section as claimed in claim 9, wherein said low friction member is made of a low friction material.
11. A neutral section as claimed in claim 9 or 10, wherein glass beads are incorporated in the low-friction member.

12. A neutral section as claimed in any one of claims 9 to 11, wherein said low friction material is PTFE.

13. A neutral section as claimed in any one of claims 9 to 12, comprising two such low friction members forming a pair of rails.

5 14. A neutral section as claimed in any preceding claim, wherein a semiconductor tape is attached to the spine of the neutral section.

15. A neutral section as claimed in any preceding claim, wherein electrical plates are attached to the spine of the neutral section.

10 16. A neutral section as claimed in claim 15, wherein each of said electrical plates are made of epoxy resin with chopped strand glass fibre reinforcement.

17. A neutral section as claimed in claim 15 or 16, wherein the plates are spaced at a distance of 100mm or more.

18. A neutral section as claimed in any one of claims 15 to 17, wherein the plates have spherical surfaces.

15 19. A neutral section as claimed in any preceding claim, wherein the leading ends of the neutral section are upturned.

20. A neutral section substantially as hereinbefore described with reference to Figures 1 to 8 of the accompanying drawings.

20

25

30

35

ABSTRACTNEUTRAL SECTION

In a neutral section (1) for use with an overhead railway conductor line, which neutral section (1) is disposed between the ends of the conductor line when in use and
5 comprises an insulator (10) to isolate the ends of the conductor line from each other; the neutral axis of the neutral section (1) being such that when the neutral section (1) is in use the neutral axis is aligned closely with the neutral axis of the conductors on its either side and the height of the insulator (10) is chosen so that the stiffness and the
10 dynamic mass of the neutral section (1) closely match those of the conductors on its either side in both the vertical and horizontal planes.

[Figure 7]

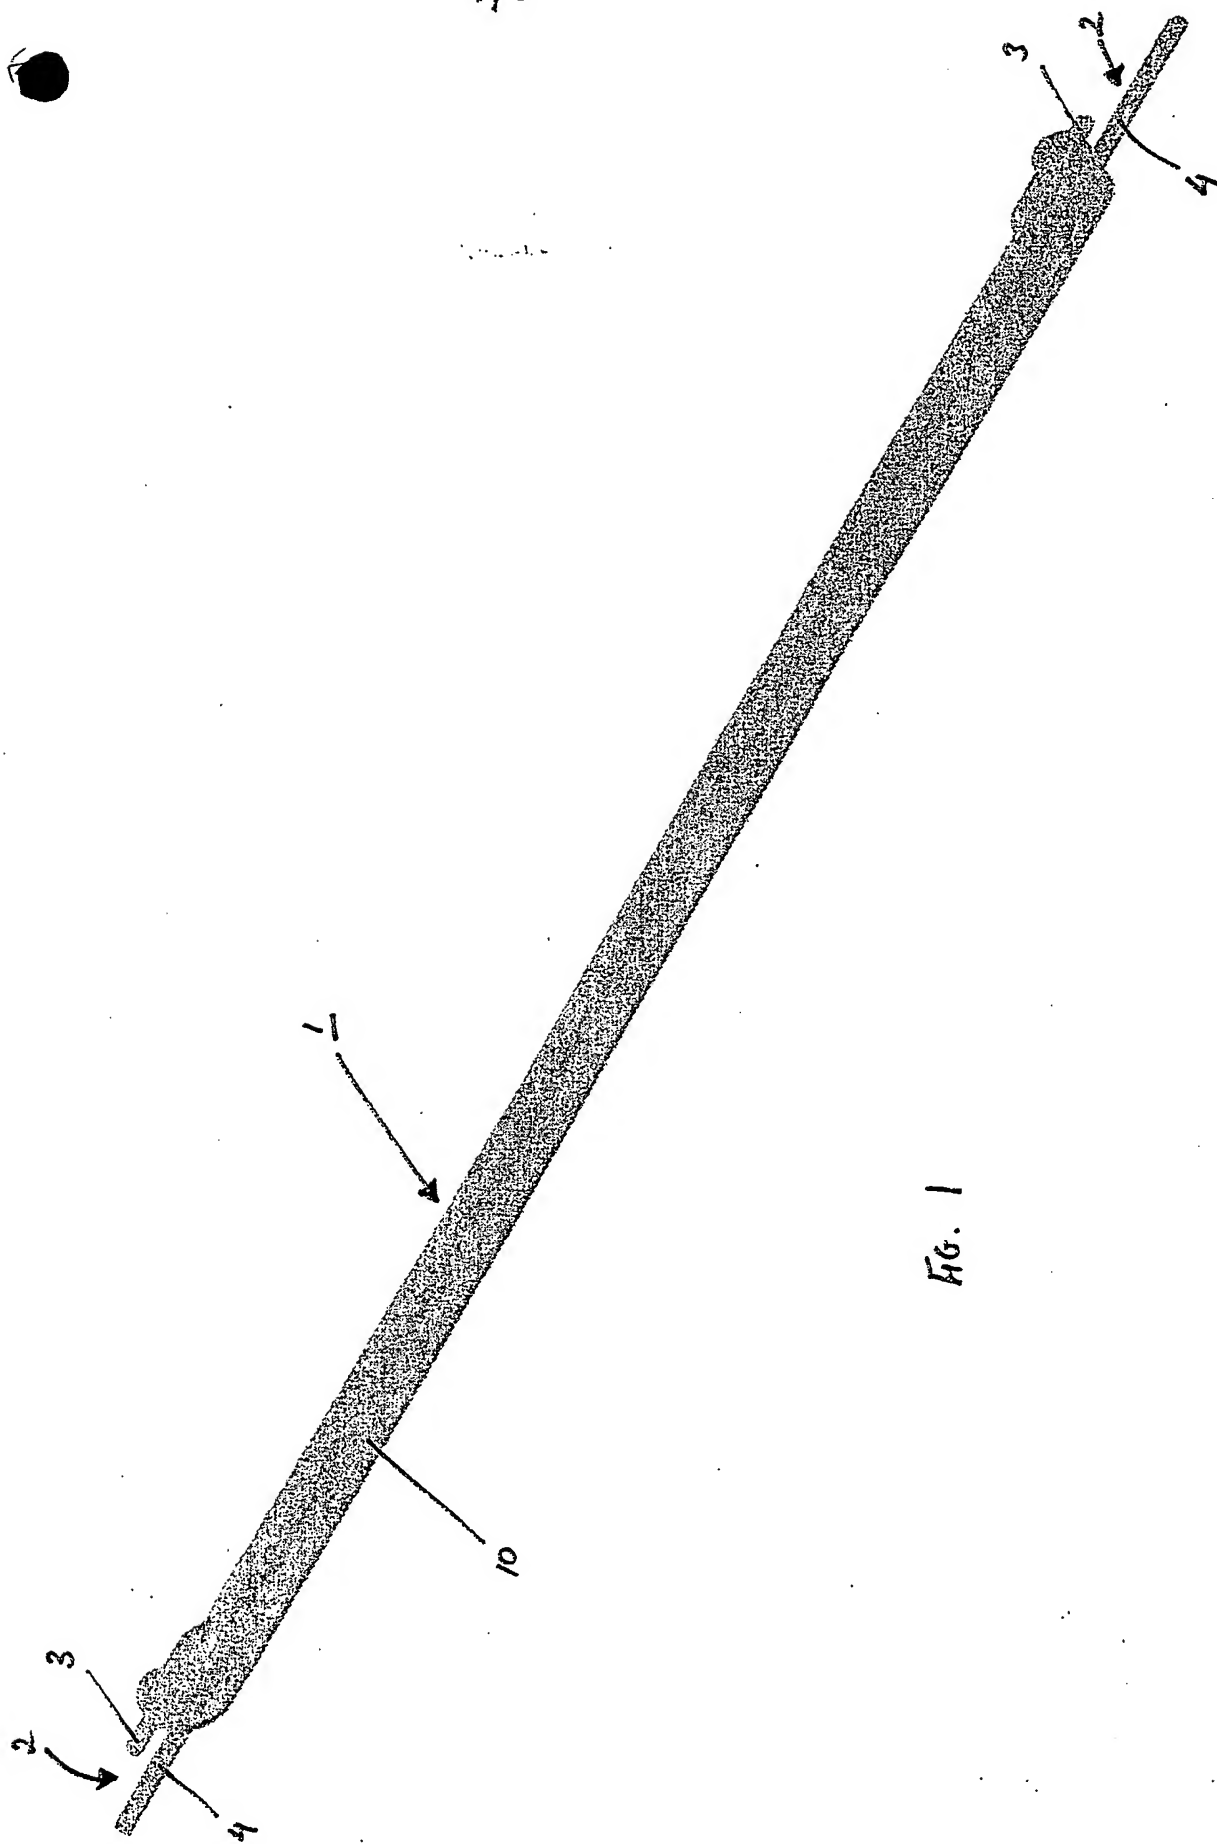


Fig. 1

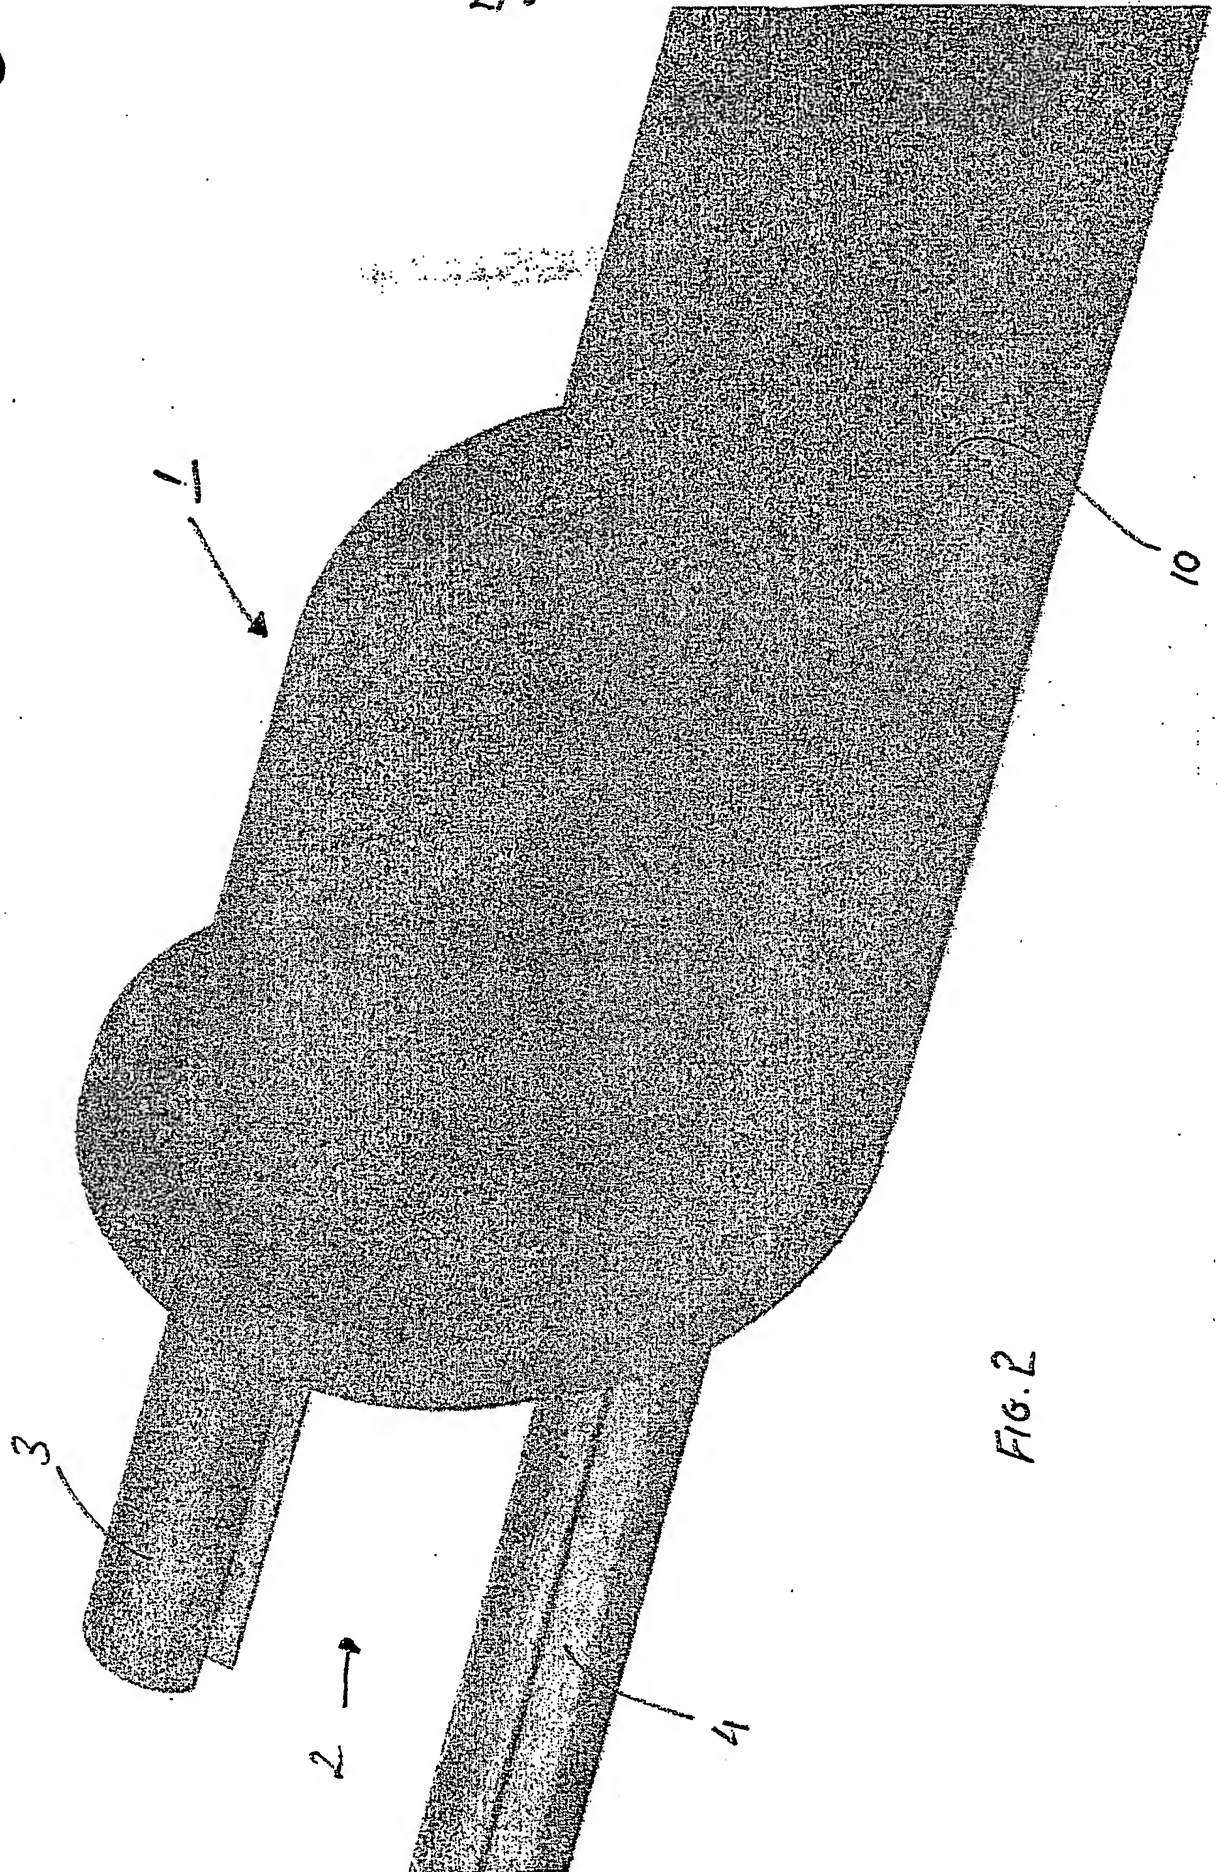


FIG. 2

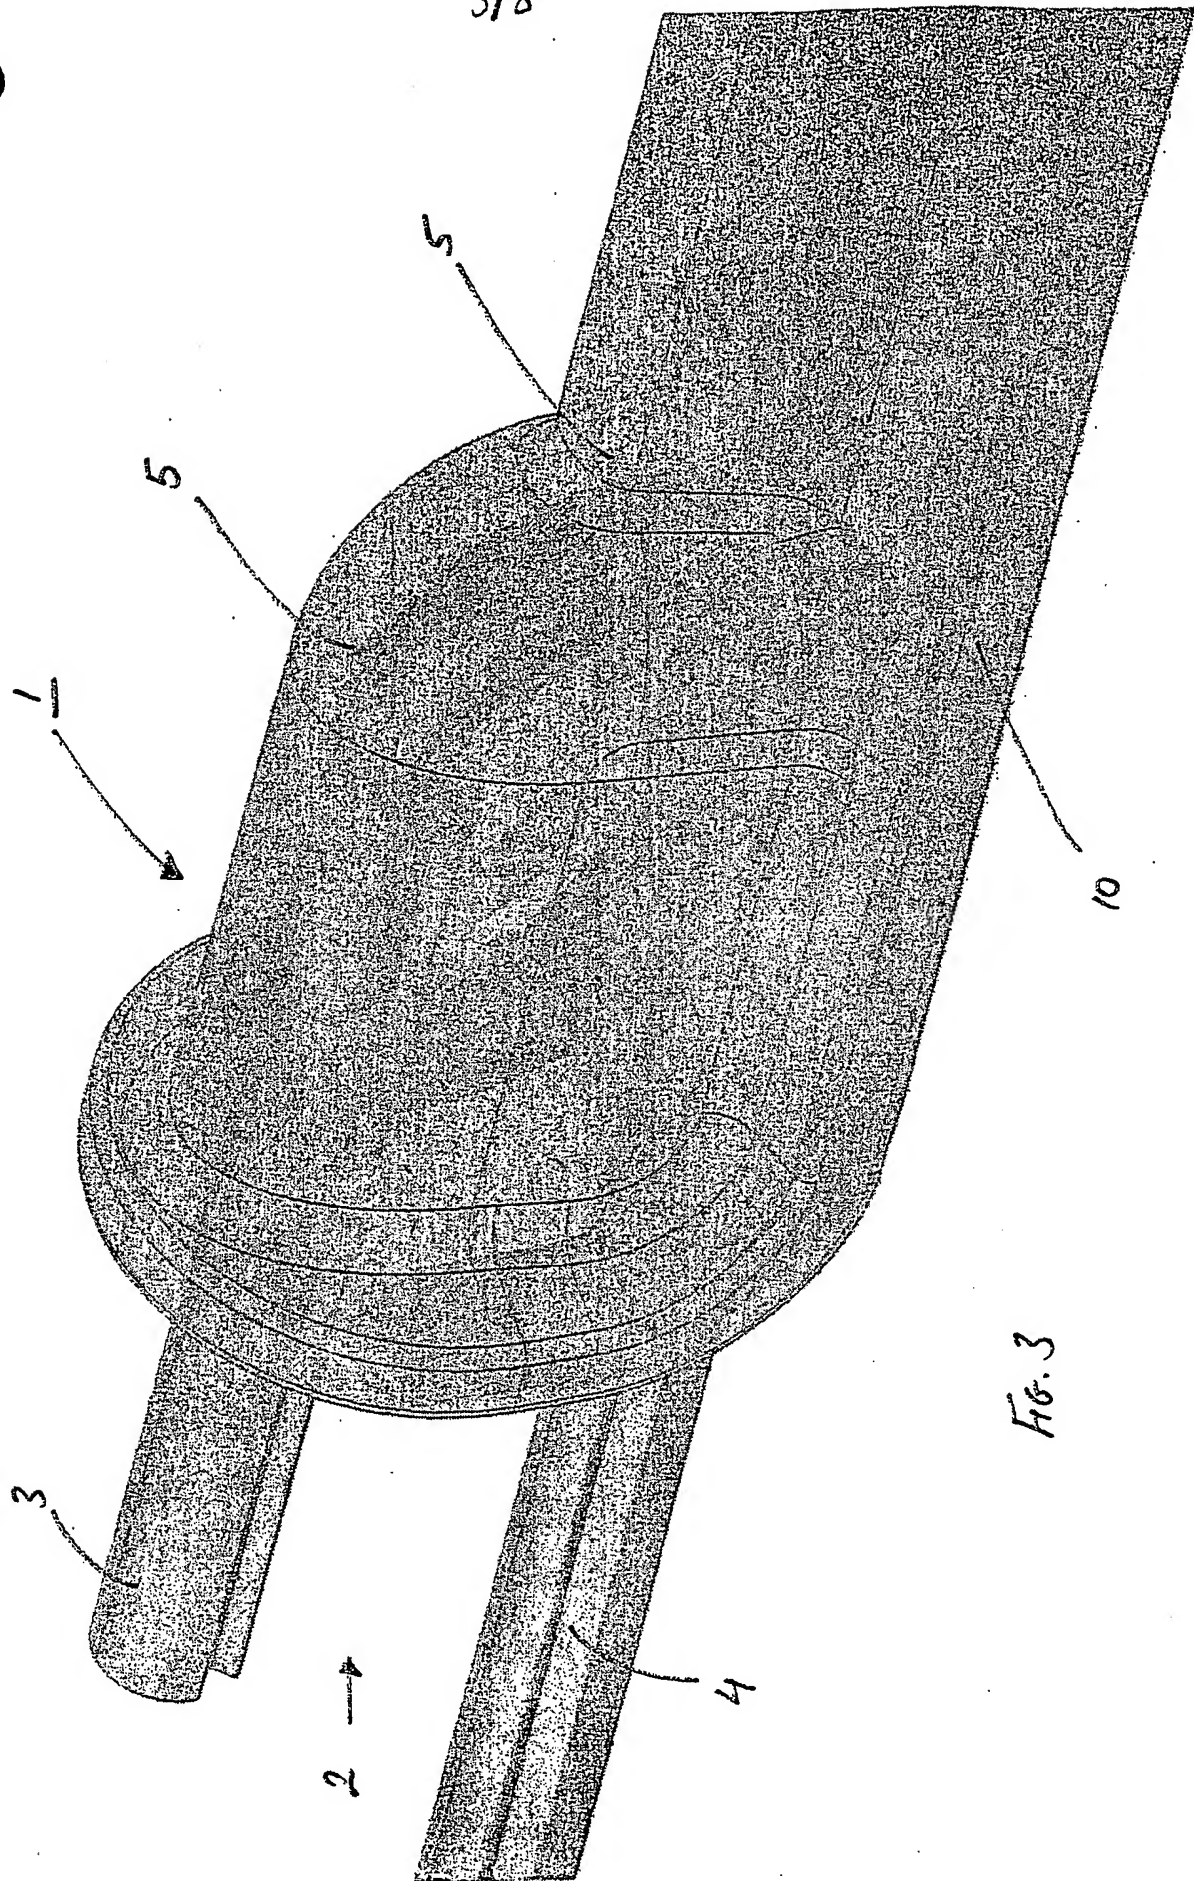


FIG. 3

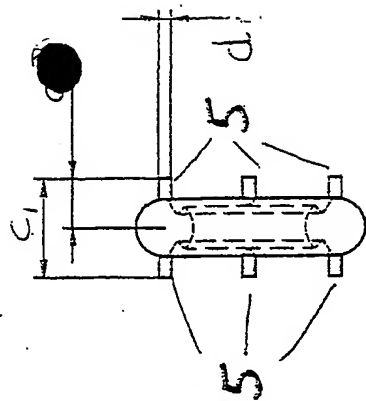


FIG. 4C

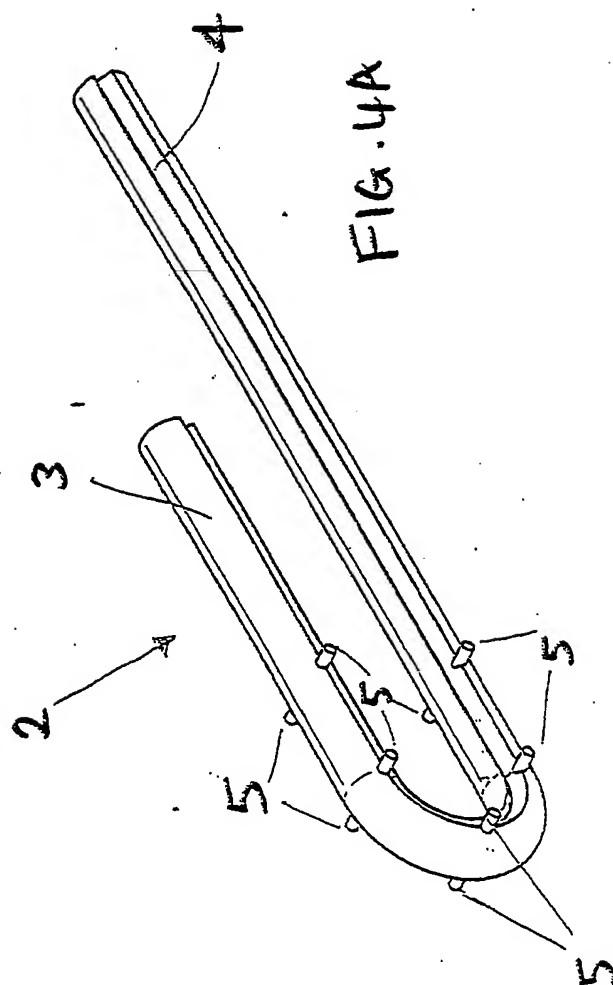
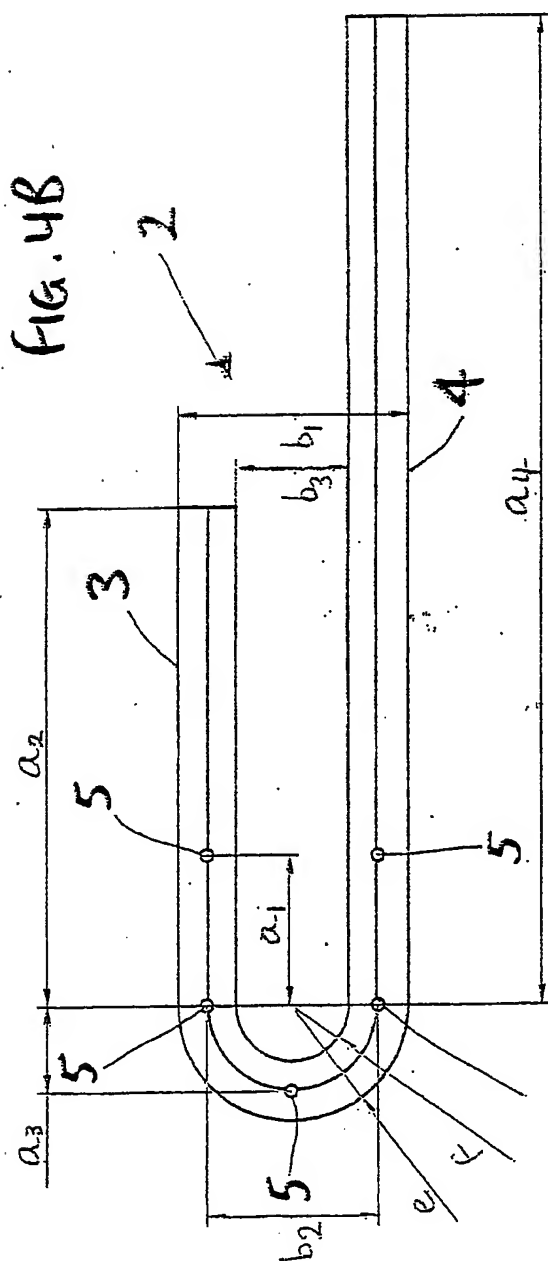
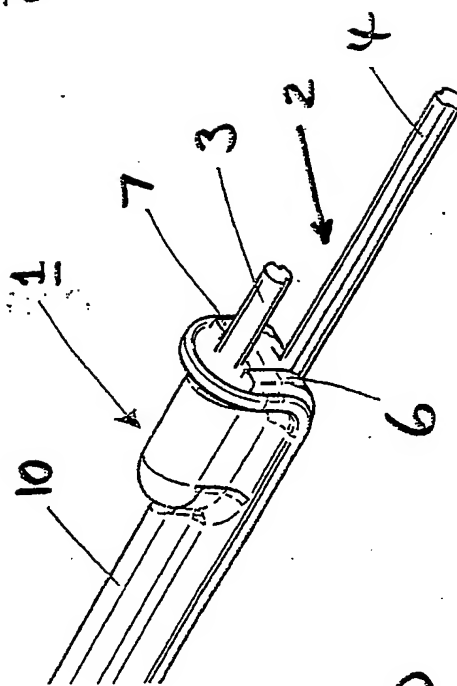
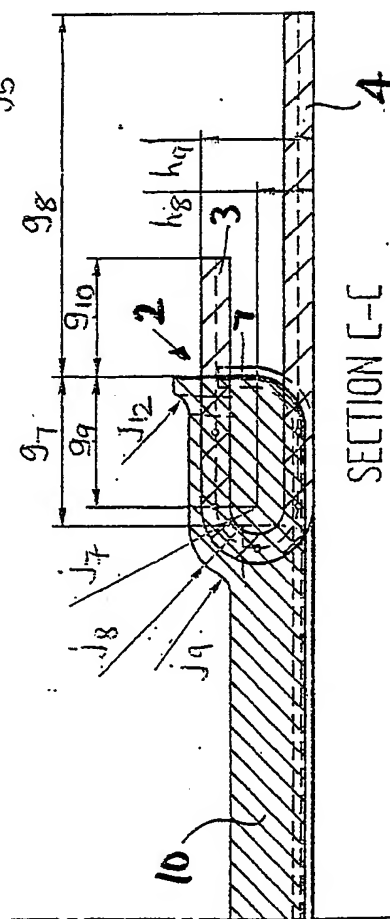


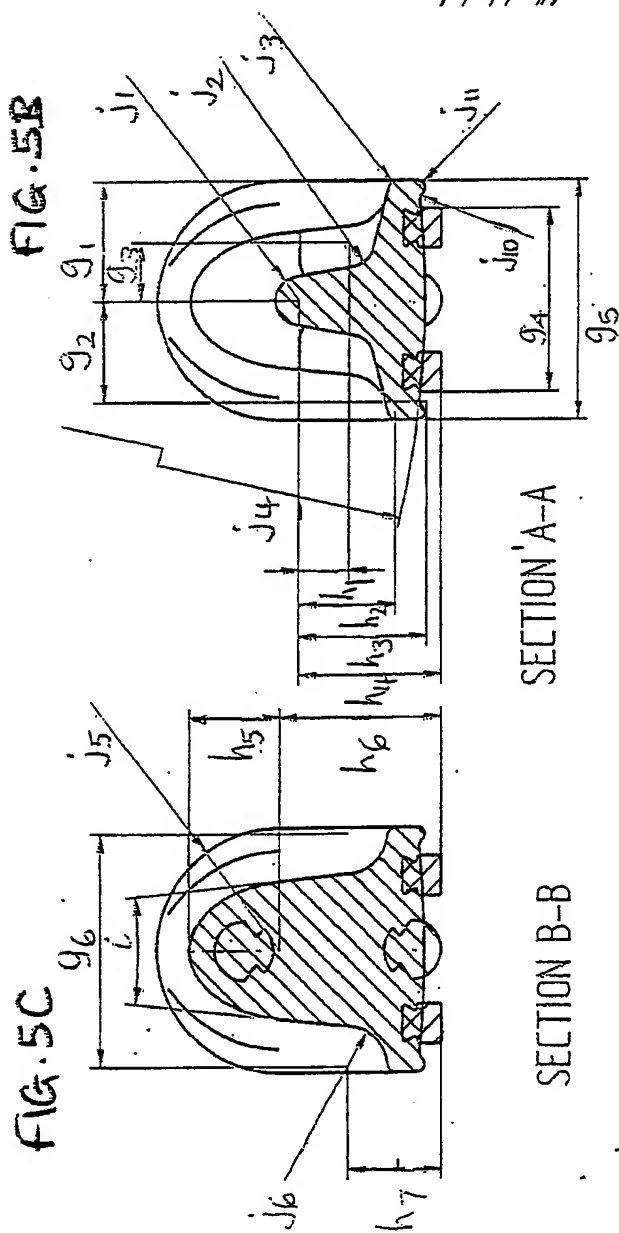

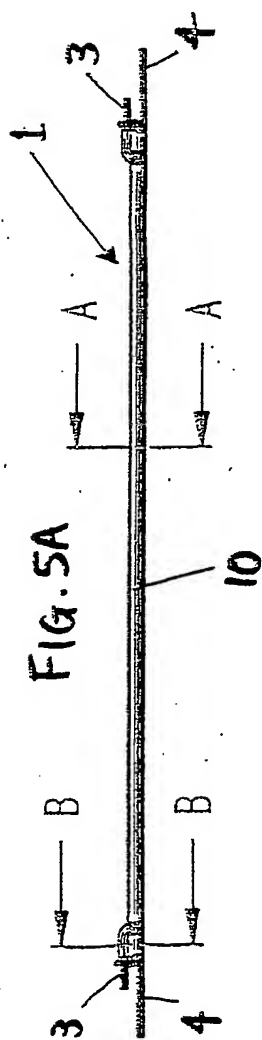


FIG. 4A



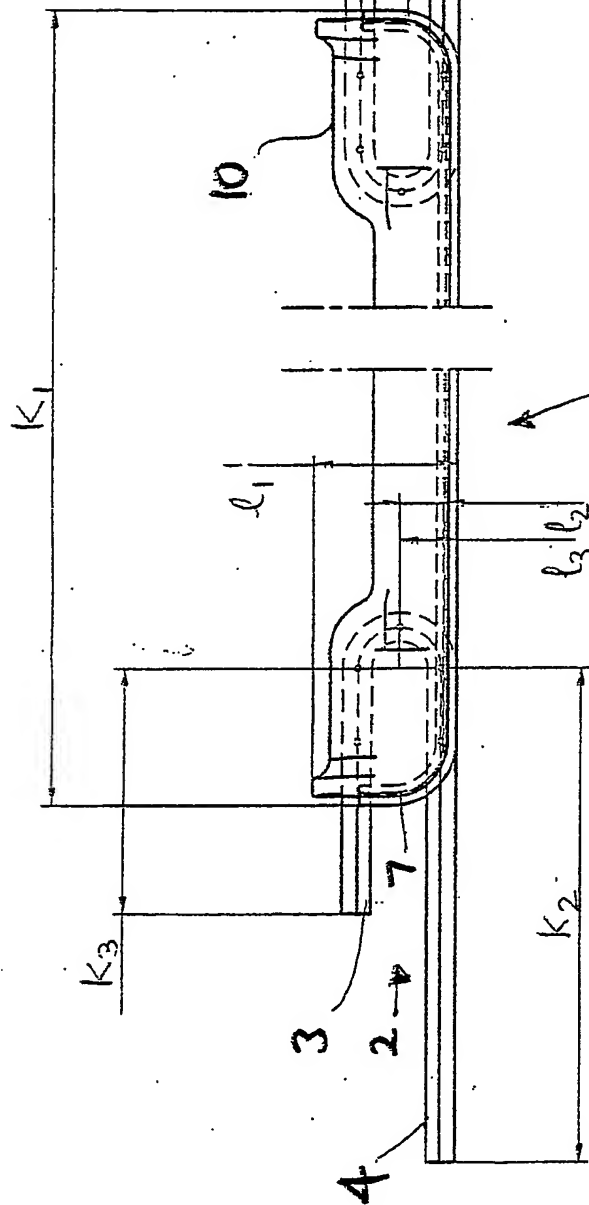


FIG. 6A

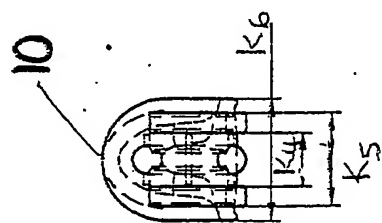


FIG. 6B

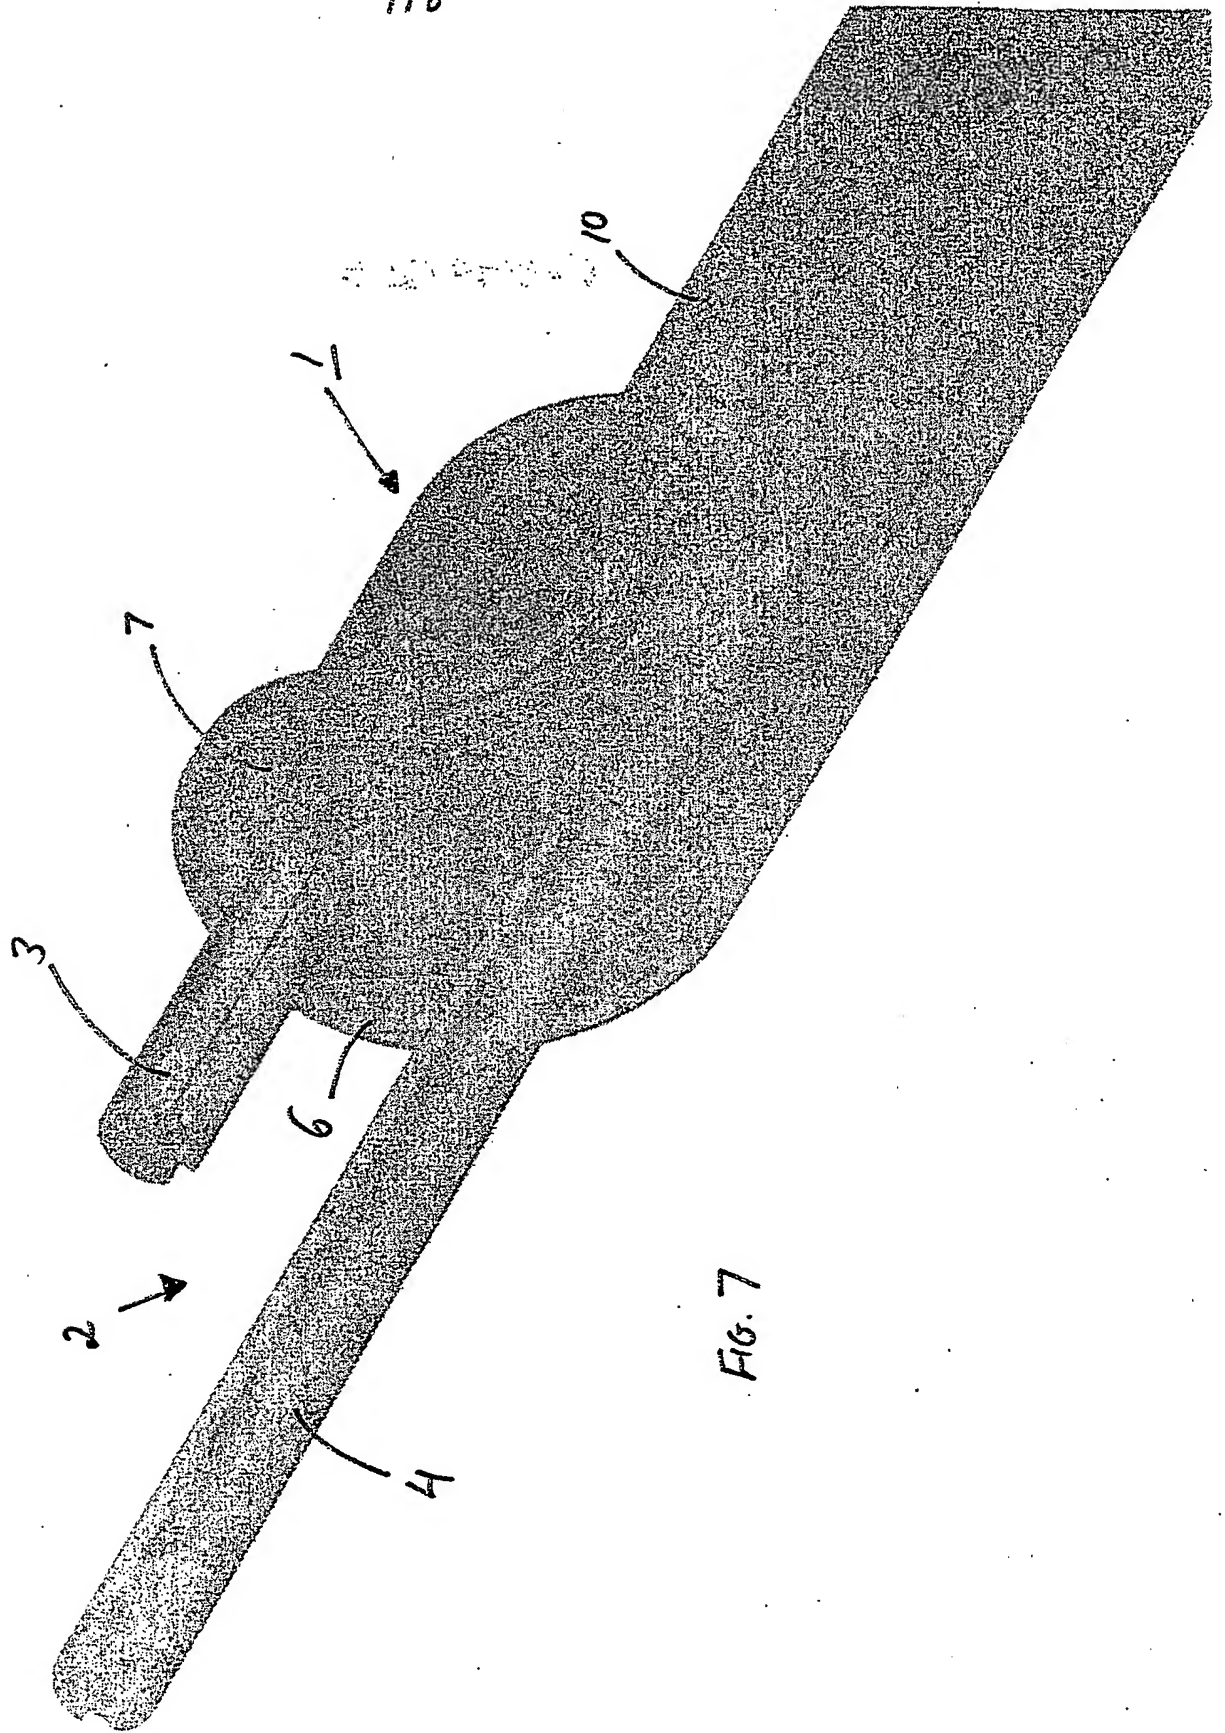


FIG. 7

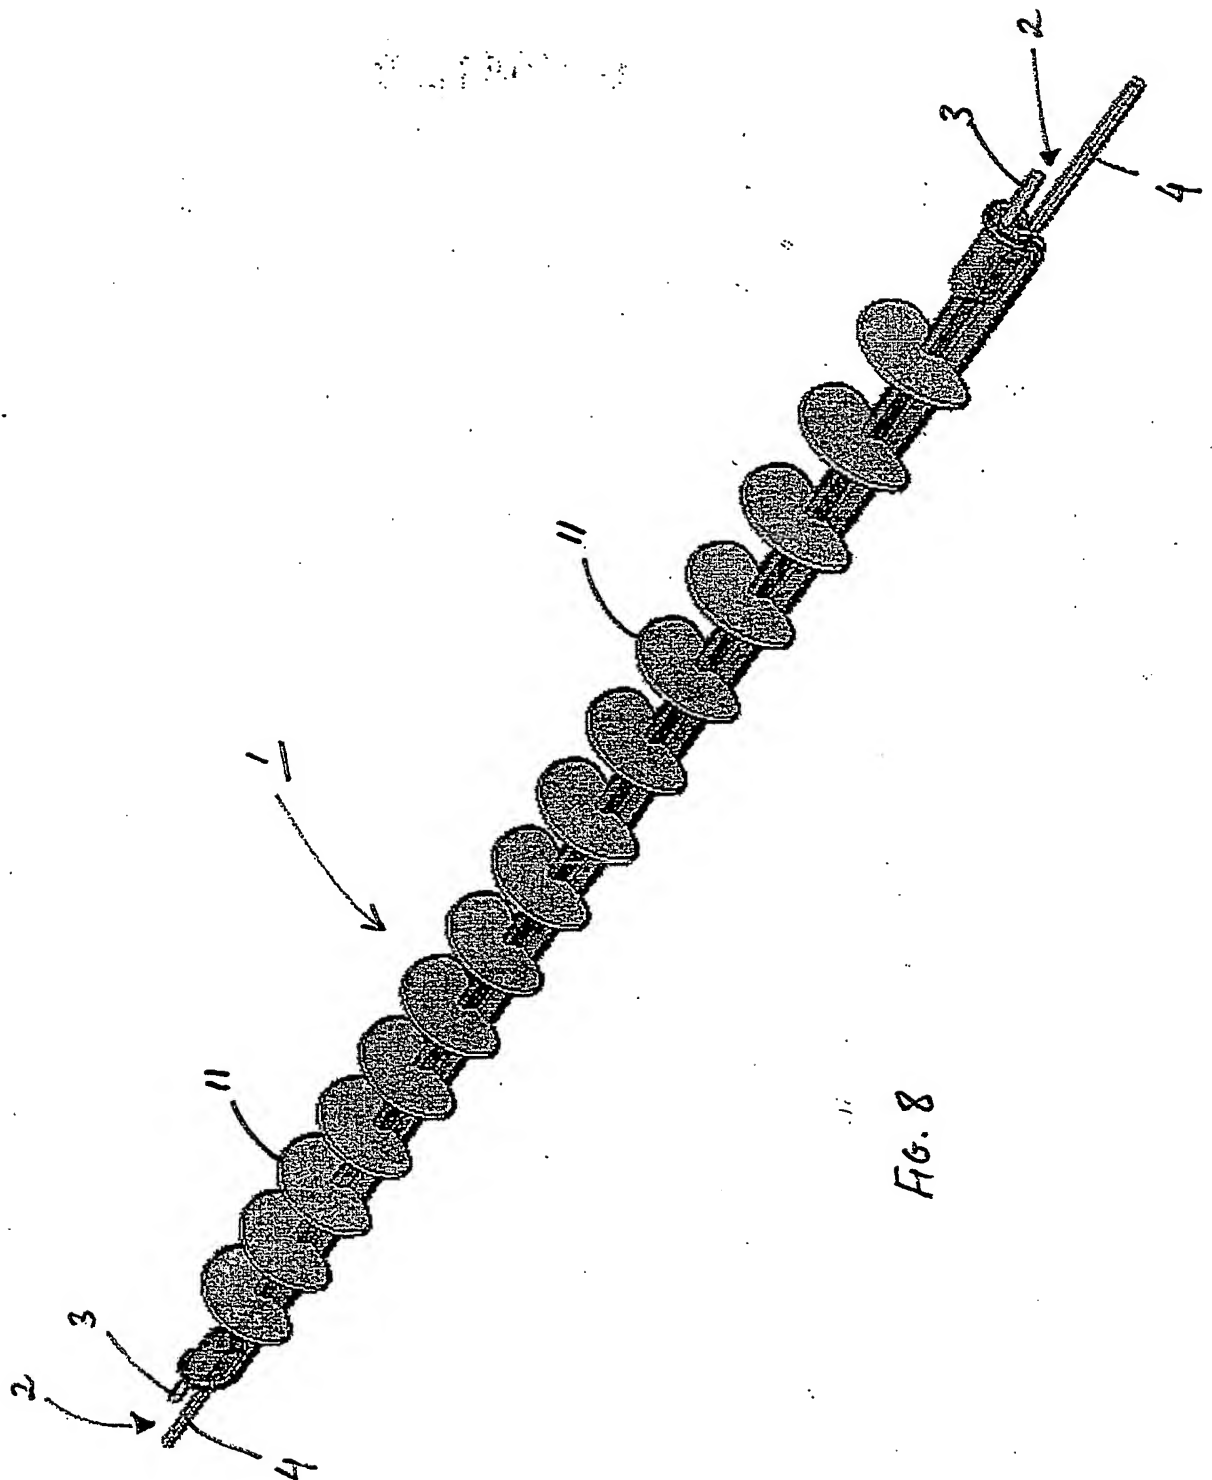


FIG. 8

PCT/GB2004/002251



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.